Panasonic

ideas for life

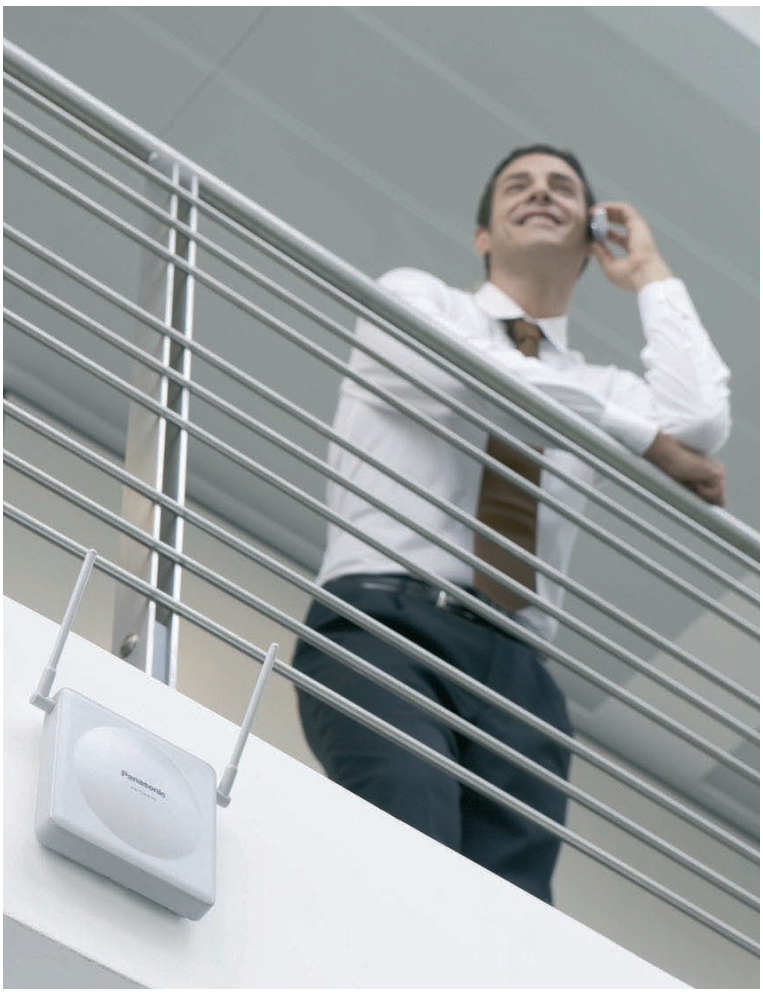

Hybrid IP PBX System

KX-TDA30

The Networked System that
Maximizes Your Business Performance
in an Age of Convergence

Creating an Intelligent Communications Environment

Revolutionary changes are occurring today in both telecommunications and information technologies.

Panasonic's Hybrid IP PBX system is a powerful communications tool designed to support businesses in today's Converged Networking age. The KX-TDA30 provides advanced telephone and messaging solutions, efficient and flexible communications, DECT Wireless Mobility, Voice-Over-IP, and seamless integration with your PC through plug-n-play USB connection.

In line with Panasonic's commitment to user-friendly operation, the Hybrid IP PBX system is easy to use, even if you don't have a lot of IP experience. KX-TDA30 lets you keep pace with leading-edge technology and features that will completely transform the way your company communicates.

Makes Communications Easy

Panasonic's digital telephones are stylish, easy to use, and efficient.
With their large, easy-to-read LCD and four tilt positions, they make life easier for their users and look great too.

Alphanumeric Display

Visual feedback on this user-friendly display makes it easier to handle calls and perform other tasks. Use it to view a variety of information (see list below) or to access the Hybrid IP PBX system's many features. You can also make calls by simply following the visual prompts shown on the display.

- Log of incoming and outgoing calls (Call Log)
- Incoming caller's name and number (Caller ID)
- System/personal speed dialling
- Extension lists
- Menu of system features
- Call duration
- Message waiting, absent messages, feature settings
- Calling extension's number and name
- Time and date

Message/Ringer Lamp (Red/Green)

The large, easy-to-see lamp illuminates to indicate when a call comes in, so you can tell when the telephone is ringing even from a distance. The colour of the lamp indicates the status – flashing green for an internal extension line, flashing red for an outside line, and constant red to indicate that a caller has left a message.

Headset Jack for Hands-Free Convenience

Digital Speakerphone

Programmable Keys with Red/Green LED

Time-Saving, Easy-to-Use Navigator Key

KX-T7636 with KX-T7603

6-Line Back-lit Display, 24 CO Keys, and a Speakerphone

Optional 12 CO Keys and USB port

Multi-language Capability

The Hybrid IP PBX accommodates up to five different languages, for use in areas where more than one language is commonly spoken. The language can be set at the PBX for a specific telephone extension, to meet the needs of the person who uses that extension.

eXtra Device Port (XDP) and Digital XDP

Use the XDP to add an analogue phone, cordless phone, or other single-line device to your system, without the cost of an additional line. This lets you send a fax while talking to a customer. Or, by connecting a modem to the XDP, you can download data from your PC or access the Internet while talking. The Digital XDP allows you to increase the number of digital telephones without additional cards. It lets you put functional digital phones in the hands of more of your staff to boost overall office productivity.

Wall Mountable

Alphanumeric Display

Easy-to-Read Back-lit Display

KX-NT343

- 3-Line Backlit Display
- 24 Flexible CO Buttons
- Speakerphone
- 2 Ethernet Ports (100 Base-T)
- Power-over-Ethernet (PoE)
- Bluetooth Module (Option)
- Add-on 12-Key Module (Option: KX-NT303) or Add-on 60-key Module (Option: KX-NT305)

KX-NT346

- 6-Line Backlit Display
- 24 Flexible CO Buttons
- Speakerphone
- 2 Ethernet Ports (100 Base-T)
- Power-over-Ethernet (PoE)
- Bluetooth Module (Option)
- Add-on 12-Key Module (Option: KX-NT303) or Add-on 60-key Module (Option: KX-NT305)

KX-T7633

- 3-Line Back-lit Display, 24 CO Keys, and a Speakerphone
- Optional 12 CO Keys and USB port

KX-T7667

- 1-Line Display, 12 CO Keys, and a Speakerphone

KX-T7640

- Digital DSS Console (60 DSS)

Digital / VoIP Telephone Specifications

		KX-T7636	KX-T7633	KX-T7667	KX-T7603	KX-T7640	KX-NT 343	KX-NT 346
Display	Alphanumeric Display (Lines x Characters)	6 x 24	3 x 24	1 x 16	-	-	3 x 24	6 x 24
	Tilt-Angle Adjustment	4 Steps	4 Steps	High and Low	4 Steps	4 Steps	4 Steps	4 Steps
	Display-Contrast Adjustment	4 Levels	4 Levels	3 Levels	-	-	4 Levels	4 Levels
	Back-lit	√	√	-	-	-	√	√
	Feature Access Keys for Display	4	4	-	-	-	4	4
Keys Audio	Programmable CO Keys with Dual-Colour LED	24 (36*1)	24 (36*1)	12	12	-	24 (36*1)	24 (36*1)
	Direct Station Selection (DSS) Keys with Busy Lamp Field (BLF)	√ *2	√ *2	√ *2	√ *2	60	*2	*2
	Navigator Keys	√	√	√	-	-	√	√
	Message / Ringer Lamp	√	√	√	-	-	√	√
Audio	Speaker-Phone (Monitor) Volume Control	12 Levels	12 Levels	12 Levels	-	-	12 Levels	12 Levels
	Handset Volume Control	4 Levels	4 Levels	4 Levels	-	-	4 Levels	4 Levels
	Ringer Volume Control	4 Levels	4 Levels	Off and 4 Levels	-	-	4 Levels	4 Levels
	Off-Hook Call Announcement (OHCA)	√	√	-	-	-	-	-
	Whisper OHCA	√	√	√	-	-	√	√
Connection	USB Module (KX-T7601) Connectable	√	√	-	-	-	-	-
	Digital eXtra Device Port (DXDP)	√	√	-	-	-	-	-
	Optional Headset Compatible*3	√	√	√	-	-	√	√
Others	Station Speed Dial Numbers	10	10	10	-	-	10	10
	Wall Mount	√	√	√	√	√	√	√

*1 36 programmable CO Keys are available when the optional 12-CO Key Add-On Module (KX-T7603) is selected.
*2 Can be assigned to a Programmable CO Key.
*3 Only a ø2.5mm pin jack is connectable.

Ergonomically-Designed, 4-Step, Tilt-Angle Adjustment

More Freedom, Greater Clarity

Today's companies need to keep their employees fully accessible throughout the day. Panasonic Wireless DECT connectivity does exactly that. It also boosts customer loyalty, reduces work time and accelerates response. Wireless communication over an extended range is achieved by using multiple cell stations that boost the flexibility and mobility of your wireless handset. With the Wireless XDP, you can set your wireless telephone to have the same extension as your desk telephone, and then receive calls even when away from the desk. You're always there, ready to receive your customers' calls, and make the most of every business opportunity that comes along.

PS roaming using an ICD group

One PS can be registered to a maximum of 4 PBX systems, allowing the user to visit any of the four (4) branch offices using the same PS. The PS will perform PBX registration automatically when the user visits the branch site.

KX-TD7685 and KX-TD7695 Features

- 6-line, Blue LCD Backlight
- Illuminated Keypad
- Multiple Language Display
- Speakerphone
- Programmable Soft Keys
- PBX functionality support
- 100 entry Phonebook
- Headset Compatible
- 9 polyphonic Ringer Melodies and 6 ringing patterns
- Vibrate Alert
- Meeting Mode

An Affordable System that Improves Efficiency

With its intelligent call-handling functions, the Panasonic Hybrid IP PBX system can serve as the core of an efficient small contact centre for outstanding customer service. Use the Hybrid IP PBX to automatically distribute incoming calls as desired.

Calls can be queued while your team is busy on the telephone; pre-recorded messages can be played to reassure callers while they wait for their call to be answered. If there is no reply or if the phones are all busy, music or pre-recorded promotional messages can be played on hold. You can also assign a backup extension as an overflow destination for calls not answered within a specified period of time.

The system provides a variety of call distribution patterns. Effective use of the different patterns – Automatic Call Distribution (ACD)*, Uniform Call Distribution (UCD), Priority Hunting, and Simultaneous Ring – can help you manage calls more efficiently.

Group Features
- VIP Call (Priority Answer)
- CLIP Distribution
- Queuing Table

Agent Features
- Log-in / Log-out
- Ready / Not Ready
- Wrap up

Supervisor Features
- Monitoring group activity in real time, with real-time display view
- Historical analysis
- Agent management with DSS
- Agent status monitor
- Remote agent log-in / out by DSS
- Autoanswer by headset

Messaging that Adds More Value and Accuracy to Your Business

Panasonic Voice Processing Systems let you to record, send and retrieve messages 24 hours a day, 7 days a week world-wide, and help to efficiently handle your telephone system traffic and internal communication needs.

If you are short of staff, you can handle calls with the Automated Attendant Service.

You can even customise the system to meet the needs of different callers using Multilingual Service and Caller ID Call Routing. By combining this with a Panasonic Voice Mail System, you can get additional features that are available only from Panasonic, such as Live Call Screening, Two-Way Recording, and Two-Way Transfer.

Multiple PBXs can also share a single voice mail unit to enable centralized voice mail control.*

*Requires the optional KXTDA3920 SD Feature Enhancement card

Higher Productivity, Greater Customer Satisfaction

An optional USB port makes it easy to connect a Panasonic digital telephone to your personal computer. Using PC Phone and PC Console software, you can integrate your phone system with a database, giving you a powerful support tool for Customer Relationship Management (CRM).

The caller's ID and other information automatically pop up on your PC's display before you take the call. This makes it easy to give your customers a level of service that reflects well on your company. The easier the operator can transfer the customer to the correct person, the more professional your organization looks and the more efficient you operate.

You can add a doorphone for increased security.

Panasonic Helps to Cut Costs

Least Cost Routing (LCR) saves money by choosing the most inexpensive calling route. To prevent unauthorized people from using the telephone, you can set each extension to require a password for outgoing calls. A time limit can also be set on conversations.
Using a VoIP gateway, the Hybrid IP PBX converts telephone voice signals into IP packets, making it possible for you to use VoIP technology with your present telephone units. VoIP allows simultaneous voice and data transmission on your existing managed data network.

VoIP is an ideal solution for site-to-site communications between multi-site offices and retail chains - as well as for networking branch office and remote office employees, small office/home office (SOHO) workers, and home sales personnel, allowing for flexible working environment and lowering cost.

Company-wide Voice Network

The Hybrid IP PBX can serve as the core of an inexpensive, easy-to-use interoffice networking system. It uses existing data services as if it were a private line. The KX-TDA30 supports closed number dialling and digit translation to create your own private digital network.
The KX-TDA30 also supports QSIG* protocol, allowing you to interconnect numerous PBX locations into a large, effectively seamless virtual telephone system, and giving you access to more advanced communication functions. As an example, for customers with a Panasonic KX-TDA/TDE in the head office, QSIG can be used to implement KX-TDA30s in all the branch offices. Using the network numbering plan, you can assign a telephone number to each extension in a branch or head office, reducing communication costs.

* QSIG is an industry-standard digital networking protocol. QSIG Networking is available with PBX systems that support ISDN BRI QSIG.

250 Network DSS keys for 8 PBX systems*

8 PBX systems in a private network can have a maximum of 250 network extensions stored on DSS keys (N-DSS: Network-DSS), in order to monitor busy user status across a network of KX-TDA/TDE PBXs. In addition to the Network Operator, this feature has now been expanded to allow any extension on a network the ability to monitor .

*Requires the optional KXTDA3920 SD Feature Enhancement card

Feature List

System Features

- Automatic Fax Transfer
- Automatic Route Selection (ARS)/ Least Cost Routing (LCR)
- Background Music (BGM)
- Busy on Busy
- CTI (CSTA,TAPI)
- Call Park with Indication
- Call Pickup Group
- Calling Line Identification Distribution (CLI)
- Class of Service (COS)
- Data Line Security
- Delayed Ringing
- Direct In Lines (DIL)
- Direct Inward Dialling ON SIP Trunks
- Direct Inward System Access (DISA)
- Door-Phone/Door Opener
- Echo Cancellation
- Extension Lock
- Emergency Call
- Existing APT/DPT Compatibility
- External BGM
- External Sensor/Relay for Alarm Notification
- Flexible Numbering Plan (4 digits)
- Floating Extension
- Greeting Message
- Host PBX Access Code
- Hunting Group
- Hurry-Up Transfer
- Incoming Group (Hunting Group)
- Intercept Routing - Busy/DND
- Intercept Routing - No Answer
- Intercept to Trunk
- Main Processing (MPR), Card/CS Software Download
- Manager Functions
- Multiple Language Support
- Online Diagnostics
- Operator Functions
- PC Console/PC Phone
- PC Programming
- Paging Group
- Quick Setup
- Remote Alarm Notification
- Remote Extension Status Control through DISA
- Remote Extension Lock
- Ring Group
- Special Carrier Access
- Station Message Detail Recording (SMDR)
- Tenant Service
- Timed Reminder
- Time Service (Day/Night/Lunch/Break)
- Toll Restriction
- Trunk Group
- Uniform Call Distribution (UCD)
- User Group
- VIP-Call
- Visual Caller ID

<Voice Mail (VM) Features>

- Automatic Configuration - Quick Setup
- Call Forwarding to VM
- Caller's Identification Notification to VM
- Centralized VM
- E-mail Integration**
- Intercept Routing to VM
- Live Call Screening (LCS)
- Remote PBX Data Control by VM
- Telephone Display, Menu Driven VM Operation
- VM Data Control by PBX
- VM (Digital/DTMF) Integration
- VM Mail Transfer
- VM Menu on the LCD* (KX-T7636/T7633 only)

Extension Features

- Absent Message
- Account Code Entry (Forced)
- Automatic Callback Busy
- Automatic Redial
- Boss - Secretary
- Broadcasting
- Caller ID to SLT
- Call Forwarding (All Calls, Busy, Busy/No Answer, No Answer, Follow Me, From Incoming Group)
- Call Hold
- Call Pickup (Directed, Group, DSS, Deny)
- Call Splitting
- Call Transfer (Screened, Unscreened, One-Touch Transfer, Transfer Recall)
- Conference (3-Party Conference, Multi Party Conference, Unattended Conference)
- Conference with Broadcasting up to 32-Party
- Dial Type Selection
- Digital SP-phone
- Digital eXtra Device Port (DXDP)
- Direct One-Touch Answering
- Do Not Disturb (DND), DND Override
- DSS Console
- Executive Busy Override
- Extension Directory
- Extension-to-Trunk Call Duration Time
- External Feature Access
- Flexible Buttons
- Hands-free Operation
- Handset/Headset Selection
- Hot Line
- Large LCD Features with Back-lit
- Last Number Redial
- Log-In/Log-Out
- Message Waiting
- Multi-Lingual Display
- Multiple Hop Call Forwarding (4 steps)
- Music on Hold
- Off-Hook Call Announcement (OHCA)
- Off-Hook Monitor
- One-Touch Dialling
- Paging (Deny, Paging Transfer)
- Paralleled Telephone (APT/DPT+SLT, DPT/SLT+PS)
- Redial, Last Number
- Remote Station Control
- Special Carrier Access
- Speed Dialling - Personal/System
- Time and Date Display
- Tone-Pulse Conversion
- Trunk Answer from Any Station (TAFAS)
- Walking COS
- Whisper OHCA (Off-Hook Call Announcement)
- Wrap-Up
- eXtra Device Port (XDP)

<DECT Features>

- Automatic Handover
- Headset Compatibility
- Incoming & Outgoing Call Log
- PS Roaming
- Wireless XDP Parallel Mode
- Vibrator Ring

Networking Features

- ARS with VoIP
- DISA Call to the Network
- Network Closed Numbering
- Network ICD group**
- Private Network to Public Network
- Public Network to Private Network
- Transfer to Network PBX
- Virtual Private Network (VPN)
- VoIP Network (Optional IP-GW)
- 250 Network DSS keys for 8 PBXs**

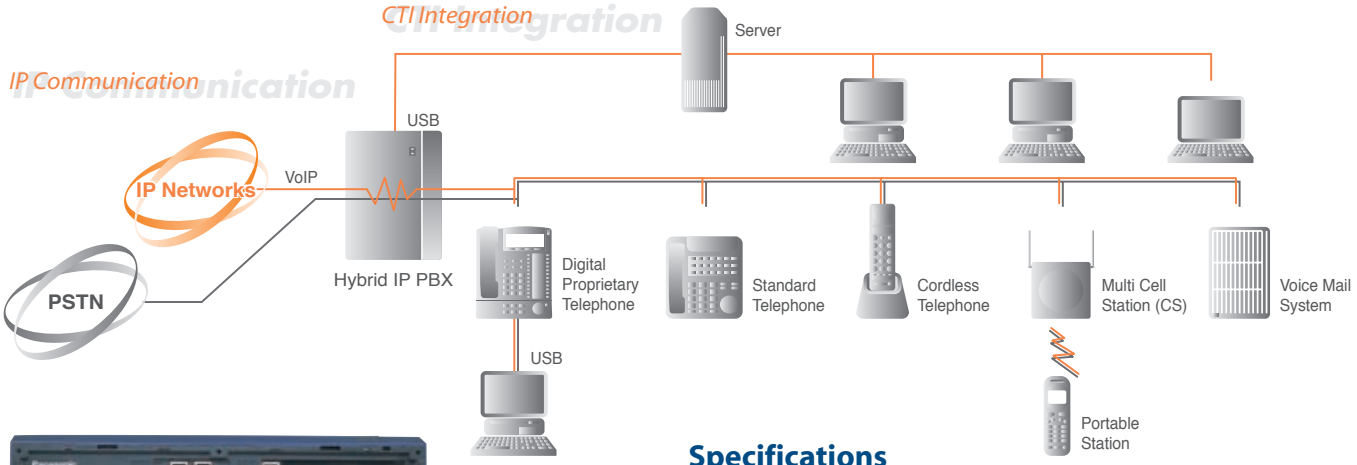

System Capacity

Maximum Configuration

The Hybrid IP-PBX supports the following configuration.

Line Type	Maximum Number
Trunk Line	12
VoIP Line	4
SIP Trunking	4

Maximum Terminal Equipment

Terminal Equipment Type	Without Additional AC Adapter	With Additional AC Adapter	
	Without MEC Card	Without MEC Card	With MEC Card
SLT	24	24	
KX-T7600 series DPT/DSS console	Total 24	Total 24	Total 48
KX-T7600 series DPT	24	24	48
KX-T7600 series DSS console	4	4	
Cell Station	4	8	
Wireless Telephone	28	28	
Voice Processing System	1 System*1	1 System*1	
SLT, PT, DSS console, and VPS	Total 28	Total 28	Total 52
PC-Console	2	2	
PC-Phone	24*2	24*2	
Door Opener	4	4	
Doorphone	4	4	
External Sensor	4	4	
External Relay	4	4	

*1 A maximum of 8 channels of a single VPS can be connected to the Hybrid IP- PBX.
*2 Five licenses are provided on each CD-ROM.

Option List

Model	Description	Maximum Quantity
KX-TDA3171	4-Port Digital Extension Card (DLC4)	1
KX-TDA3172	8-Port Digital Extension Card (DLC8)	2
KX-TDA3173	4-Port Single Line Telephone Extension Card (SLC4)	1
KX-TDA3174	8-Port Single Line Telephone Extension Card (SLC8)	2
KX-TDA3180	4-Port Analogue Trunk Card (LCOT4)	3
KX-TDA3193	4-Port Caller ID Card (CID4)	3
KX-TDA3450	4-Channel SIP Trunk Card	1
KX-TDA3451	4-Channel SIP Expansion Card	1
KX-TDA3470	4-Channel IP Extension Card	1
KX-TDA3480	4-Channel VoIP Gateway Card (IP-GW4)	1
KX-TDA3105	Memory Expansion Card (MEC)	1
KX-TDA3161	4-Port Doorphone and External Input / Output Card for KX-T7765 (DPH4)	1
KX-TDA3166	8-Channel Echo Canceller Card (ECHO8)	1
KX-TDA3168	Extension Caller ID Card (EXT-CID)	1
KX-TDA3191	2-Channel Message Card (MSG2)	2
KX-TDA3196	Remote Card (RMT)	1
KX-TDA3920	SD Memory Card for Software Upgrade to Enhanced Version	1
KX-TDA0155	2-Channel Cell Station Unit for DECT Portable Station	8
KX-A236	Additional AC Adaptor	1
KX-A228	S/M-type Back-up Battery Cable	1
KX-TDA0300	PC Condole Software	2
KX-TDA0350	PC Phone Software	24
KX-T7765	Doorphone	4

+ Please refer to System Capacity chart.

Specifications

		KX-TDA30
Dialling	Trunk	Dial Pulse (DP) 10pps, 20pps / Tone (DTMF) Dialling
	Extension	
Switching		Non-blocking
Power Failure	Backup	Several hours with optional batteries
Connections	Trunk	RJ11 connector
	Extension	RJ11 connector
	Paging Output	2-conductor jack (MINI JACK3.5mm diameter)
	External (Music on Hold) output	1 conductor jack
Serial Interface Port	RS-232C	1 (Max. 115.2kbps)
	USB	1
SMDR	Detail Recording	Date, Time, Extension Number, CO Line Number, Dialled Number, Call Duration, Account Code
Power Source		100V AC to 240V AC, 1.5A, 50Hz / 60Hz
Power Consumption (Average)		55W
Safety Certification		UL, CSA, SEMKO, GS
Dimensions (W x H x D)		275 x 376 x 117mm
Weight (full mounted)		3.5kg

System Feature Capacity

			KX-TDA30
System	Tenant		8
	Class of Service		64
	Trunk Group		64
	Paging Group		32
	Call Pickup Group		64
	Incoming Call Distribution Group		128 (32 extensions/group)
	VM (DPT) Group		1 group x 4 ports (8 channels)
	VM (DTMF) Group		2 groups x 24 ch
	Queuing Time Table		64
	Idle Extension Hunting Group		64 (16 extensions/group)
	SMDR Call Storage		200 calls
	Absent Message (System/Extension)		8 messages x 16 characters / 1 message x 16 characters
	Message Waiting – PT+SLT		256
	Number of characters for Display ID		20
	Extension Number		1-4 digits
	Call Park Area		100
	Conference		3-8 parties per conference (32 parties total)
	Verified Code		4 digits (1000 entries)
	Vertified Code Personal Identification Number (PIN)		10 digits (1000 entries)
	Special Carrier Code		16 digits (20 entries)
	Host PBX Access Code		10 digits (10 entries/Trunk Group)
	DDI/DID Table		32 digits (1000 entries)
Dialing	Emergency Call		32 digits (10 entries)
	Quick Dialling		4 digits (80 entries)
	System Speed Dialling	Without MEC	32 digits, 1000 entries
		With MEC	Additional 1000 32-digit entries
	Personal Speed Dialling	Without MEC	32 digits, 10 entries/extn.
		With MEC	32 digits, 100 entries/extn.
	Hot Line		32 digits
	Redial		32 digits
ARS	Routing Plan Table		16 entries
	Leading Number Table		16 digits (1000 entries)
	Leading Number Exception Table		16 digits, 200 entries
	ARS Carrier		10
	Itemised Billing Code		10 digits
	Authorisation Code		10 digits
Networking	TIE Routing Table		32 entries
	Leading Number		3 digits
	PBX Code		7 digits
	NDSS: Monitored PBXs		8
	NDSS: Registered Extensions for Monitoring PBX		250
Toll Restriction	Toll Restriction Level		7
	Toll Restriction Denied Code		16 digits (100 entries/level)
	Toll Restriction Exception Code		16 digits (100 entries/level)
Call Log	Outgoing Call Log – PT		100 records/extn. 240 records/system
	Outgoing Call Log – PS		100 records/extn. 140 records/system
	Incoming Call Log – PT		100 records/extn. 480 records/system
	Incoming Call Log – PS+ Incoming Call Distribution Group		100 records/extn. or group Total 2048 records/system

Panasonic®

Design and specifications are subject to change without notice.